

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 31 TOWNSHIP 17 RANGE 5

DATE: 9-25-01 6-22-06

PARTY CHIEF: Kiste

CREW: \_\_\_\_\_

TYPE OF MARKER: Brass plug set in bridge deck


METHOD OF ESTABLISHMENT: County: 10-7-99

IN. S.P.C. E ZONE NAD '83

NAME: 17053102

N: 514657.7980(m)

E: 71094.8340(m)

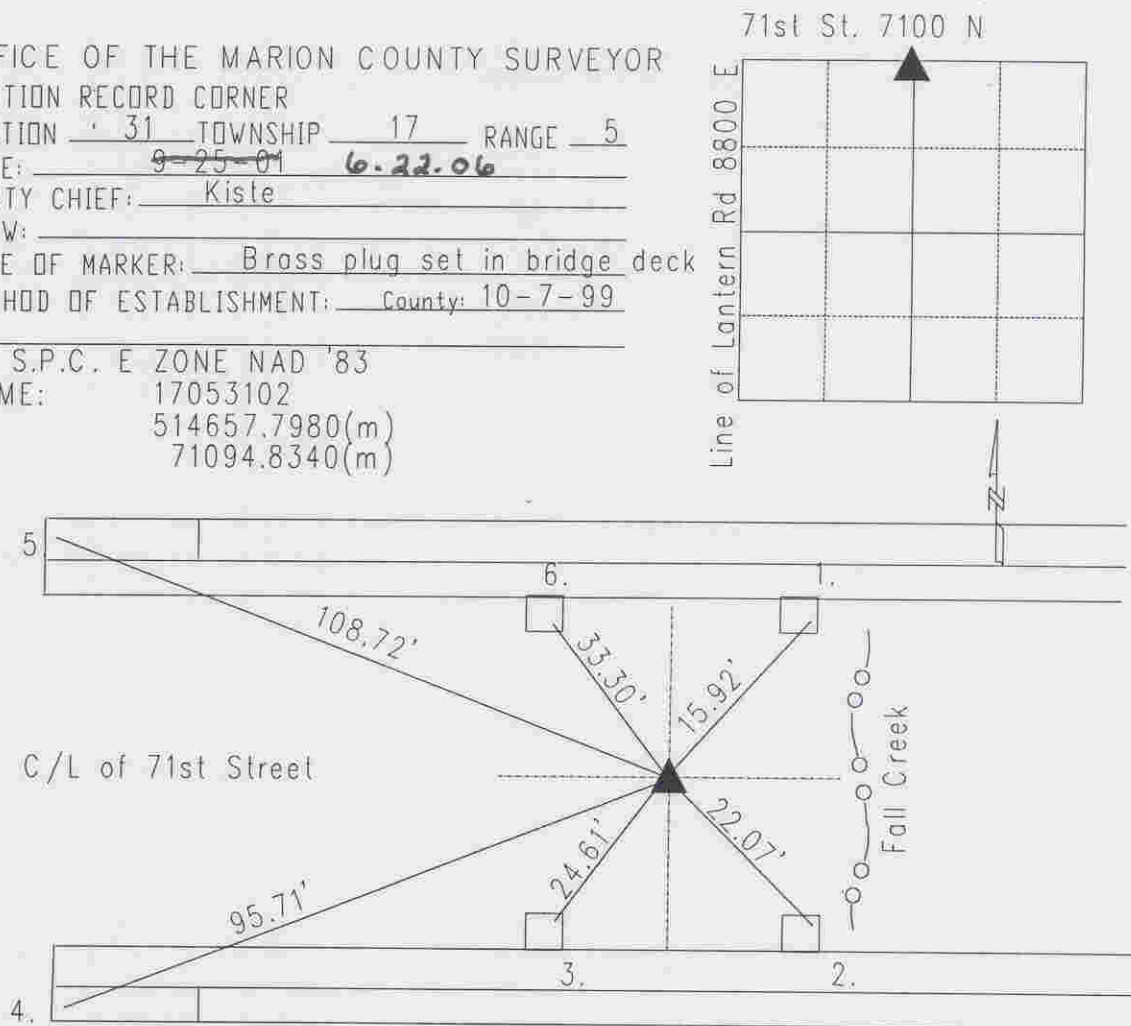

Original post set 1821 by Laughlin with witnesses: 18" beech N 49 W 4 links; 18" beech S 72 W 23 links. Legal Survey 7-1866 by Smith per Lawrence Township Legal Survey Book pg. 12 called corner "D" and 'stone on brick'. Legal Survey 11-1880 called corner '3' and 'stone on brick'. 6-61 Evans called road nail on floor of bridge over Fall creek. 8-11-69 McLand did not identify marker but described position. New bridge built per plans 11-19-68 per Lawrence Township Bridge #37. Plans showed corner 0.17' N of C/L of bridge. 5-14-75 Fortner 9-21-79 Bruer called brass plug. Schneider survey of fort called brass plug with distances & bearings W, S & E. Re-tied 10-13-94 by Wilcoxon. Re-tied 10-7-99 by Kiste. Re-tied 9-25-01 by Kiste.

17053102

REF.	DISTANCE	DESCRIPTION
1.	15.92'	Cut 'x' SE corner of inlet
2.	22.07'	Cut 'x' NE corner of inlet
3.	24.61'	Cut 'x' NE corner of inlet
4.	95.71'	Cut 'x' W-end of concrete handrail
5.	108.72'	Cut 'x' W-end of concrete handrail
6.	33.30'	Cut 'x' SE corner of inlet